


# #14 WoodTite™

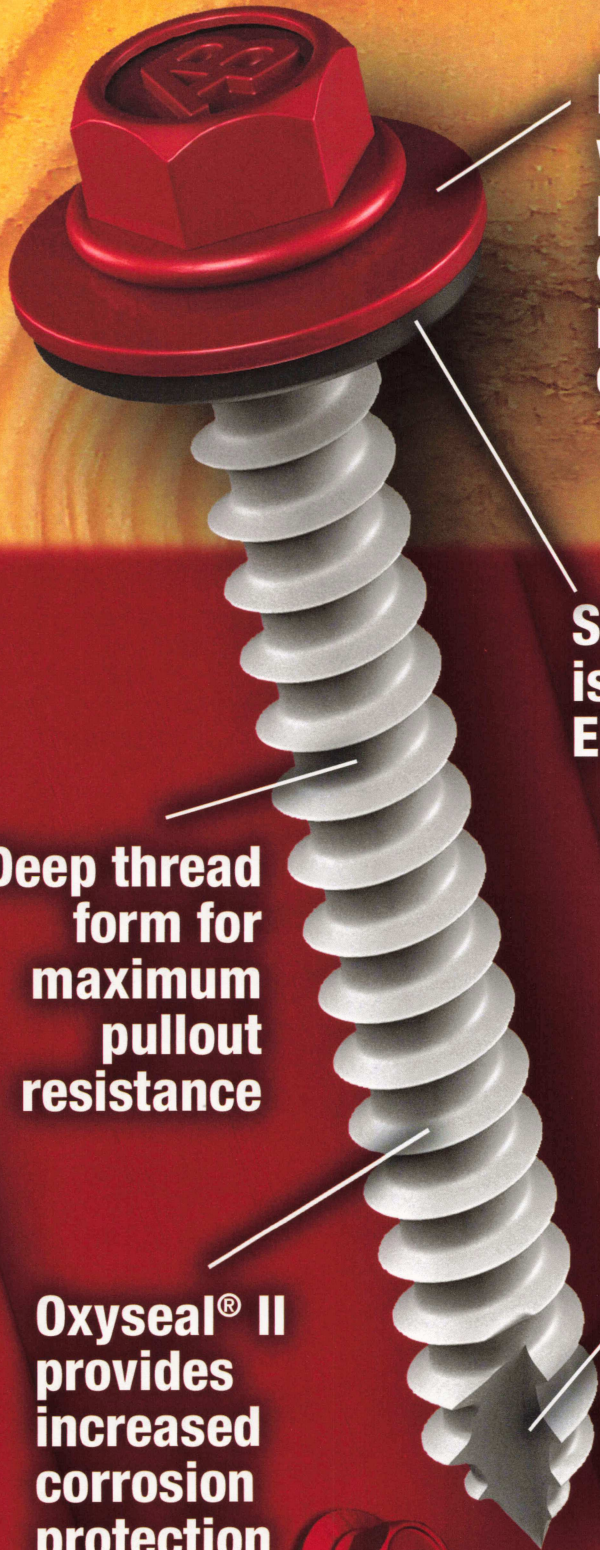

Head & Sealing washer can be painted with oven cured poly-urethane enamel

Sealing washer is non-conductive EPDM rubber

Deep thread form for maximum pullout resistance

Oxyseal® II provides increased corrosion protection

Type-17 Point easily penetrates lapped high tension steel



**ATLAS™**  
Fasteners For Construction

### Pull-Out Test Results


Screw Description	Test Material	Ultimate Pullout Lbs.
Woodtite #14-10 Mechanical Zinc Plating (.0003) Min. Sharp Point	SPF #2	1,080 (1½" Penetration)
	7/16" OSB	213
	5/8" OSB	301
	1/2" CDX	520
	5/8" CDX	430
	3/4" CDX	718



### Fastener Strength Characteristics

(Min. Values)

Size	Steel	Tensile	Shear	Torsional
#14 - 10	C1022	3150 lbs.	2150 lbs.	125 Inch lbs.

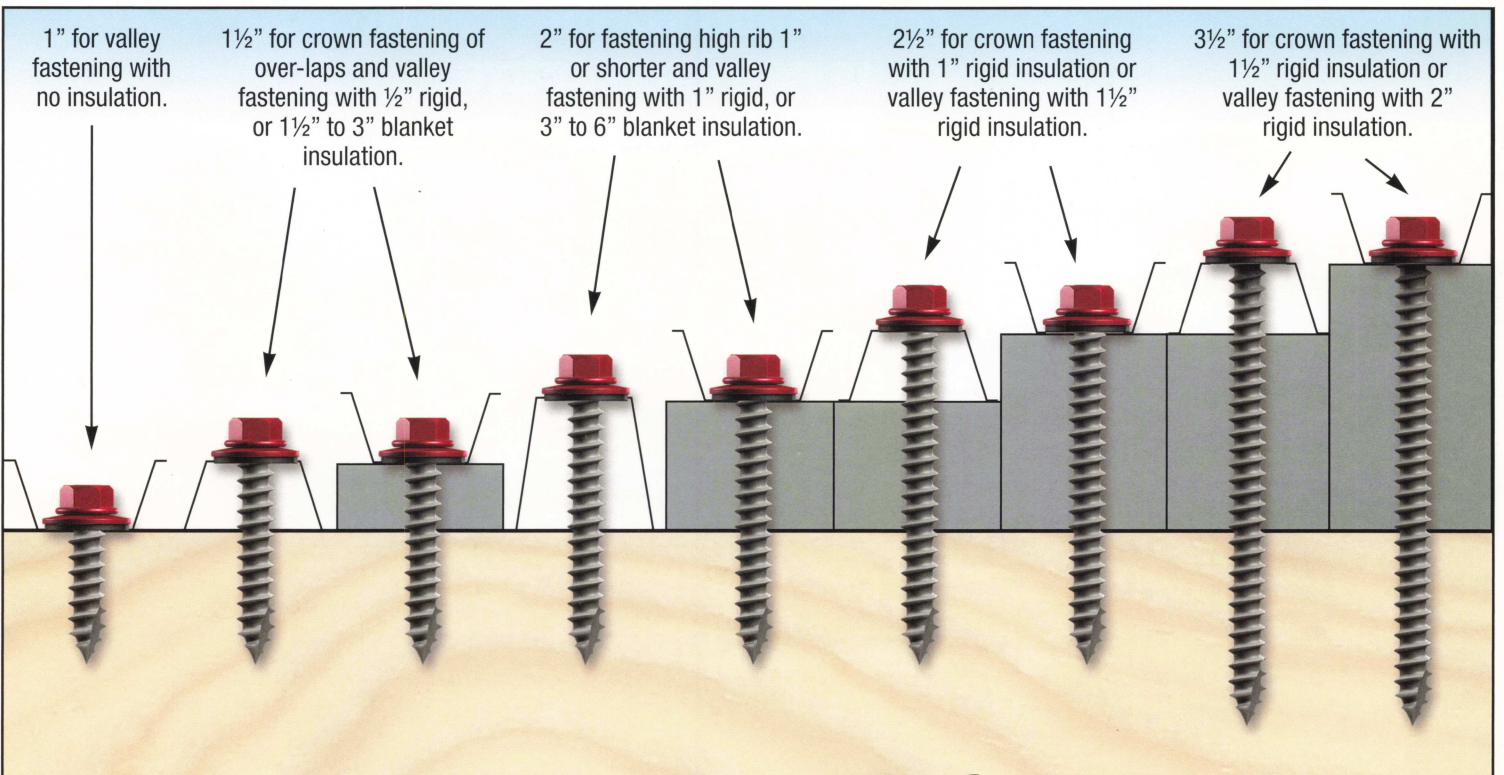

[www.atlasfasteners.com](http://www.atlasfasteners.com)

1628 Troy Road • Ashland, Ohio 44805

Phone: 419-289-6171 • Fax: 419-289-2564

**800-321-6977**

#### SALES AND SERVICE CENTERS:

Ashland, OH  
1-800-321-6977

Flat Rock, NC  
1-800-364-0370

Houston, TX  
1-800-503-2105

Salem, OR  
1-800-547-8740